


Updating your RediGate with the Latest Tarball

1. Download the "Latest Update Tarball" for your RediGate 100 Series or 400 Series device from <http://redigate.elecsyscorp.com/software>
2. If you wish to validate the SHA checksum of the downloaded file, see the Change Log documents at the above link.
3. Open up your device's configuration using ACE
4. Select "File Upload XML to Device", and make sure the "Upload additional file(s)" box is checked

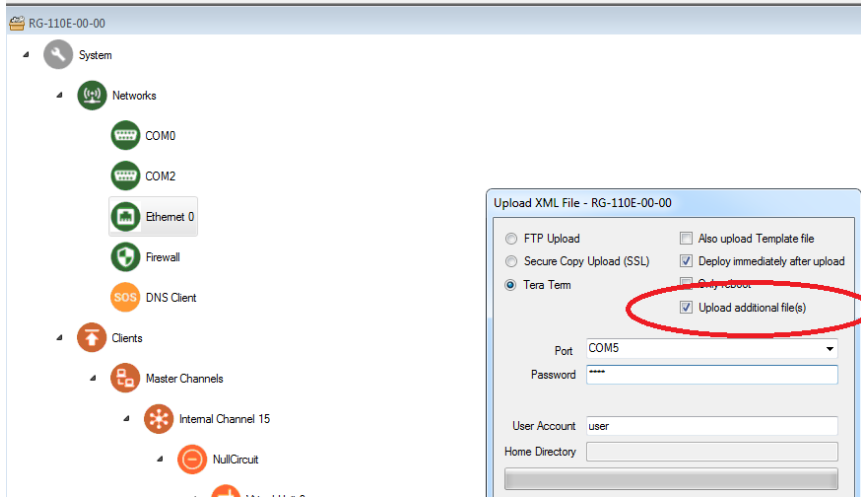


Do not change tar filename

Sometimes a Web browser may change the filename during download. In order for the .tar.gz to be properly installed, you must upload the file with its original filename. Uploading a file with a space in it (such as 2017-01-03-1400-RegiGate_400_7_ZEUS_3.12_07(1).tar.gz) will prevent the RediGate from properly installing the update, and may cause issues with future updates.

Also, do not unzip and upload the contents of the ".tar.gz" file; upload the original .tar.gz file with its full name and file extension.

5. Click "Upload", "Add File", and then select the downloaded tar.gz file

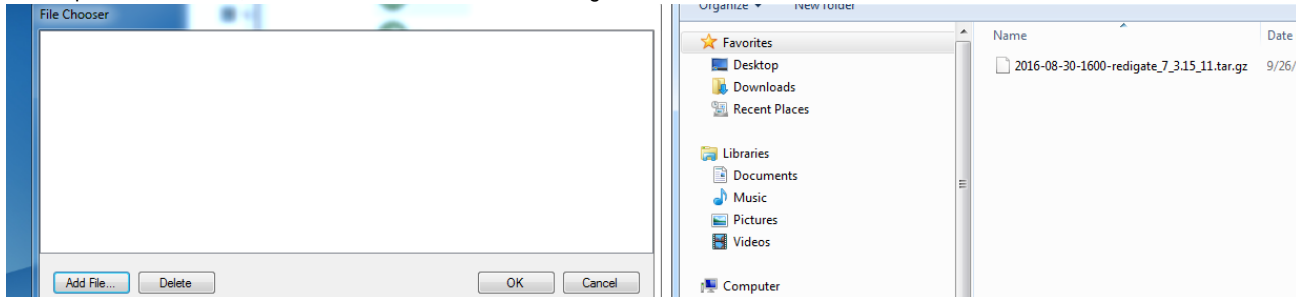

6. After the upload, you device will reset and contain the latest firmware

Confirm Software Version

You can confirm the version of software on your RediGate by logging into Putty. The screenshot below shows a RediGate with V:5.7.2016-12-29-1000:

```
===== Main Menu =====  
ElecSys (V:5.7.2016-12-29-1000) Tue Sep 20 09:34:26 2016  
MJW_120C_VPN : 1 @ 192.168.1.10 REDIGATE <48678-0001>-SerialNumb  
-----  
1) System      Services  
2) Directory   Services  
3) Diagnostics Services  
  
99 Log Off  
  
Make selection: 
```